PYROTECHNICS SENSORS

LKA : thermocouple type

Description:

Single and double thermocouple inserted into thermowells (ceramic outer and ceramic,gas-tight inner) with adjustable mounting bush. You can measure the temperature of big ovens, hot-airs, because of the robust form.

Temperature : ***„K”*** **0…1200 °C**

„S” **0…1300 ºC , *„R”* 0…1400ºC , *„B”* 0…1800ºC**

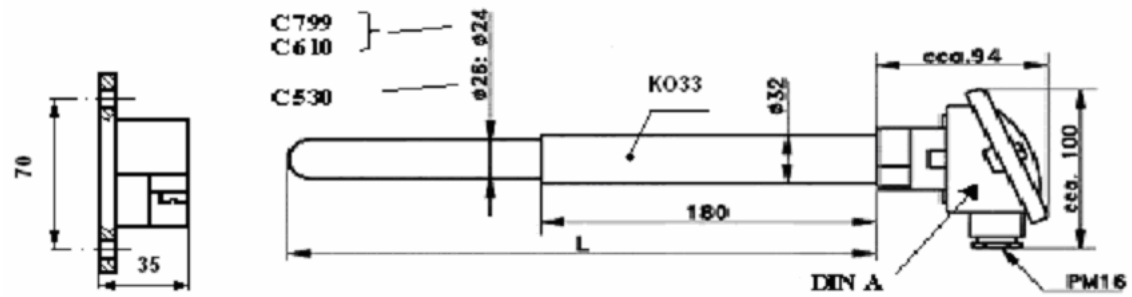

Accessories on request:
Adjustable mounting bush

Ordering code:

L	K	A									

Thermocouple type: (NiCr-Ni) K
(PtRh90/10-Pt) S
(PtRh87/13-Pt) R
(PtRh70/30-PTRh94/6) B

Class of tolerance: (K, S, R) I.
(B) II.

Diameter of thermocouple (mm): (K) 3
(S, B) 0,5
(S, R) 0,35

Construction: single
double

Ceramic isolator: C610
C799

Inner thermowell : C610
C799

Outer thermowell: C530
C610
C799

Insertion length (L)mm :

Accessories on request: Not order
Order

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.
fax: 00-36-1-282-6135 , e-mail: ugyfelsz@rhodium.hu , We will discuss the details.
If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.